

# PRODUCT DATA SHEET

Model: **PZAPT9S**


*Packaged Air-Cooled  
Portable 9 Ton Chiller*



**Legacy Chillers, Inc.**

851 Tech Drive  
Telford, PA 18969

Toll-Free: (877) 988-5464

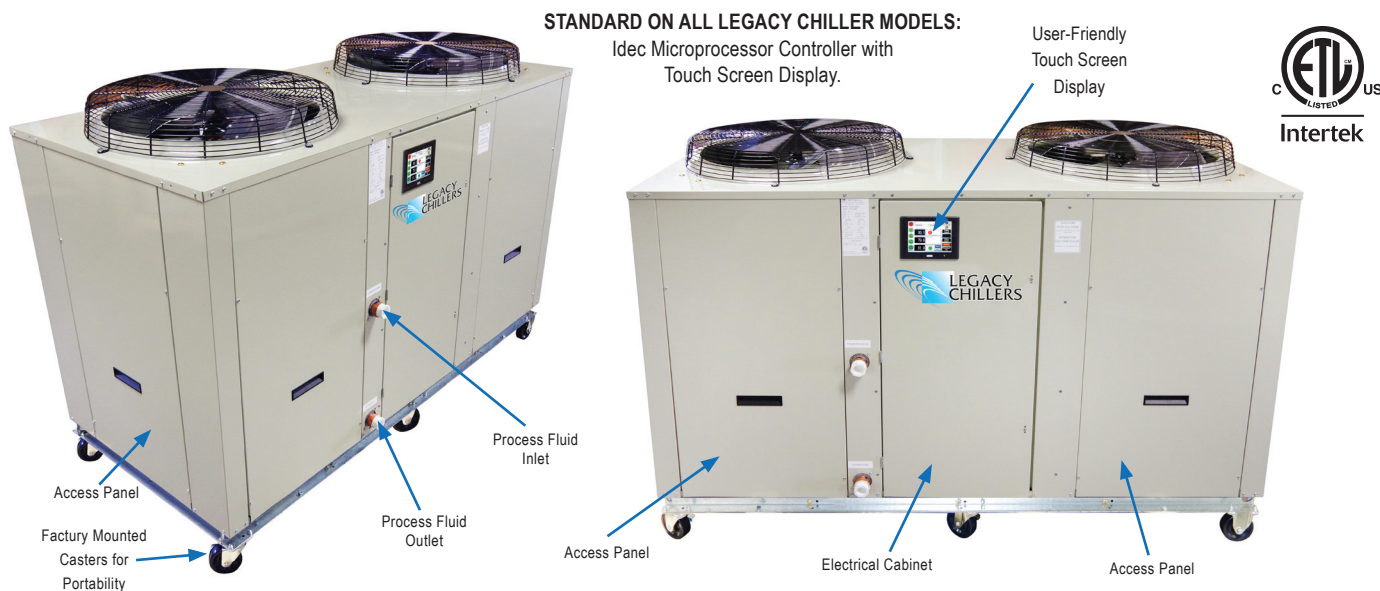

## Standard Features:

- **ETL listed** to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- **Single Point Power Connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll compressor** with crankcase heater
- **Suction accumulator**
- Noncorrosive polyethylene storage tank with 1/2" insulation
- Fused, **STAINLESS STEEL** Process pump w/ discharge ball valve
- Low flow by-pass valve
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Fan cycle control (+40°F)
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser (Air cooled): copper tube/aluminum fin
- Compressor motor, Condenser fan and process pump contactors
- Condenser motor, Process pump and control circuit fusing
- Casters (factory mounted)
- **Painted (Powder Coated), galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**

*Easy to Use  
Touch Screen Display  
on all Legacy Chiller Models*



## Options:

- **Copeland Digital Compressor**
- **Remote Idec touchscreen control panel**
- **Industrial VPN Router**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- **VFD Compressor Controller**
- 4 year extended compressor warranty
- E-Coat condenser coating (Air Cooled Models)
- 115 volt (rain tight) service outlet
- Fused Disconnect
- Non Fused Disconnect
- Phase monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor sound cover
- Factory installed evaporator heat tape freeze protection
- Process pump suction isolation valve
- Water pressure gauge set
- Stainless steel, SCH80 PVC or Polypropylene piping for de-ionized and reverse osmosis water systems
- Storage Tank Sight Glass
- Tank low fluid level indicator
- Tank auto city water make up solenoid & auto level switch
- Coastal powder coat paint protection
- **Custom powder coat paint color scheme** (Company Colors & more)
- Weather Proof HMI Cover

# PRODUCT DATA SHEET

**Model: PZAPT9S**  
*Packaged Air-Cooled  
 Portable 9 Ton Chiller*



**Legacy Chillers, Inc.**  
 851 Tech Drive  
 Telford, PA 18969  
**Toll-Free: (877) 988-5464**

## Dimensional & Electrical Table (Single Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		Process-Pump	MCA	M.O.P.	Process Pump HP	Reservoir Gal.	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.							
PZAPT9SF5	75	34	55	208/230V	3	60Hz	1	10	37.2	239	2	3.8	10.8	70	100	2	31	1.25" FPT	850
PZAPT9SH5				460V	3	60Hz			17.2	125		1.5	2.8	30	40				
PZAPT9SI5				575V	3	60Hz			12.4	80		1.72	1.5	25	30				

## Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
9S	ZB76KCE	42.0	9.8	7.6	12.1	9.3	8.5	10.5	9.0	9.0	9.7	8.8	9.6	8.9	8.5	10.1	8.2
		44.0	10.2	7.6	12.6	9.9	8.5	10.9	9.4	9.1	10.1	9.1	9.6	9.3	8.9	10.2	8.6
		45.0	10.4	7.6	12.9	9.1	9.3	11.1	9.6	9.8	10.3	9.3	9.6	9.5	9.0	10.2	8.8
		50.0	11.5	7.7	14.1	11.0	8.6	12.3	10.7	9.1	11.4	10.4	9.6	10.5	10.1	10.3	9.7

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



## Product Dimensional Drawing

