


PRODUCT DATA SHEET

Model: IESA55D
Split-System Air-Cooled
55 Ton Chiller




Legacy Chillers, Inc.
 851 Tech Drive
 Telford, PA 18969
Toll-Free: (877) 988-5464

STANDARD ON ALL LEGACY MODELS:
 Pentra Microsmart, Programmable Logic Controller (PLC)
 with HMI Touch Screen Display.

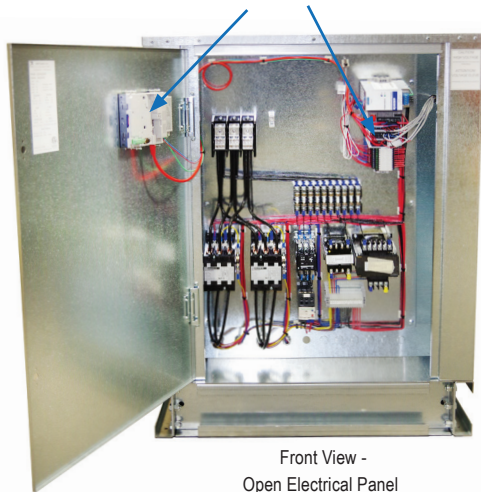


Front View -
 Open Electrical Panel

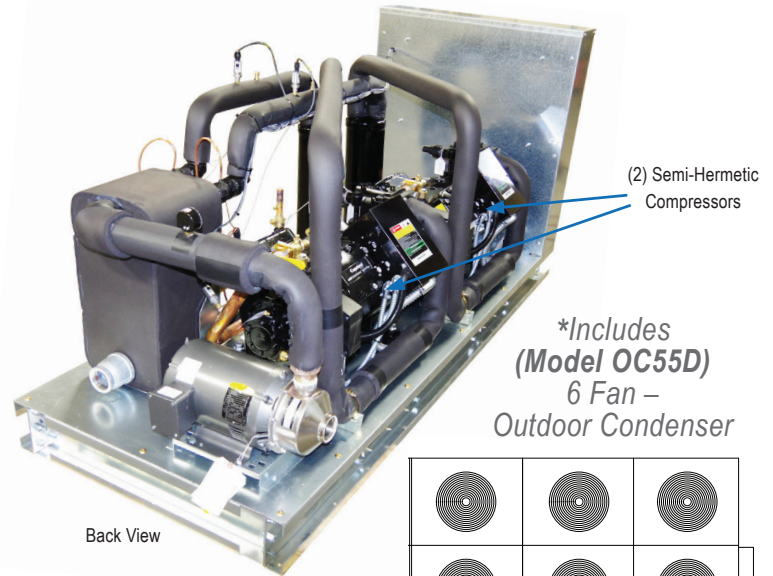

(2) Semi-Hermetic
 Compressors

**Includes
 (Model OC55D)
 6 Fan -
 Outdoor Condenser*

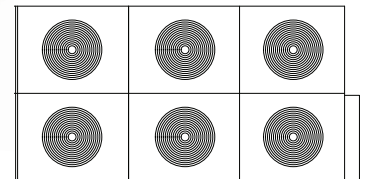

TOP VIEW

Standard Features:

- ETL listed to UL 1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Idec microprocessor controller with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- SEMI-HEMETIC compressor with crankcase heater and vibration spring mounting kit
- Compressor discharge and suction pipe vibration eliminators
- Suction Accumulator
- Liquid sight-glass, solenoid, TXV and replaceable core drier
- Water flow switch
- 24V control transformer
- Fan cycle control (+40°F)
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin, Floating Tube™
- **5 year condenser warranty against tube sheet leaks**
- Compressor motor contactor
- Individual condenser motor contactors and fusing
- Condenser control panel with factory mounted door interrupt disconnect switch
- Galvanized steel sheet metal cabinet
- 1/2 inch insulation on all water and refrigerant lines
- Operating Refrigerant charge from factory
- **Factory Performance Test prior to shipment**



**Easy to Use
 Touch Screen Display
 on all Legacy Chiller
 Models**

Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure control (-20°F)
- Factory installed evaporator heat tape freeze protection
- Fused, STAINLESS STEEL process pump
- Dual process pump with manual changeover
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Copper finned condenser coil (coastal protection)
- BohnGuard™ coated condenser coil (coastal protection)
- Epoxy or Phenolic coated fins (coastal protection)
- Door Mounted HMI with weather proof cover

PRODUCT DATA SHEET

Model: **IESA55D**
Split-System Air-Cooled
55 Ton Chiller



Legacy Chillers, Inc.
 851 Tech Drive
 Telford, PA 18969
 Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Dual Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		MCA	M.O.P	Chiller Fluid Conn.	Weight Pounds
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.				
IESA55DN5	110	34	62	200/230V	3	60Hz	2	30	155.1	650	6	7	400	500	2.5" MPT	1900
IESA55DP5				230V	3	60Hz			141.7	594		7	400	500		
IESA55DH5				460V	3	60Hz			73.7	297		3.5	200	250		
IESA55DI5				575V	3	60Hz			51.6	245		2.8	150	175		

Outside Condenser Specs (OC)

Outside Condenser	Length Inches	Width Inches	Height Inches	Fan Motor		Refrigerant Conn.		Weight Pounds
				Qty.	HP	Discharge	Liquid	
OC55D	180	88	49.13	6	1.5	1 5/8"	1 1/8"	1990

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
55D	6DGNR37ME	42.0	59.7	60.4	9.8	56.0	63.6	8.7	54.5	65.8	8.2	53.3	68.0	7.8	52.5	70.2	7.5
		44.0	62.2	60.0	10.1	58.3	64.4	9.0	56.8	66.8	8.4	55.7	69.0	8.0	54.8	71.4	7.7
		45.0	63.5	60.2	10.3	59.5	64.8	9.1	58.0	67.2	8.6	56.7	69.6	8.1	55.8	72.0	7.8
		50.0	70.0	61.0	11.3	65.3	66.4	9.8	63.5	69.2	9.2	62.2	72.0	8.6	61.2	74.8	8.2

- Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.

**Includes (Model OC55D)*
6 Fan – Outdoor Condenser

