
PRODUCT DATA SHEET

Model: IEZA2S Split-System Air-Cooled 2 Ton Chiller



Legacy Chillers, Inc. 851 Tech Drive Telford, PA 18969

Toll-Free: (877) 988-5464

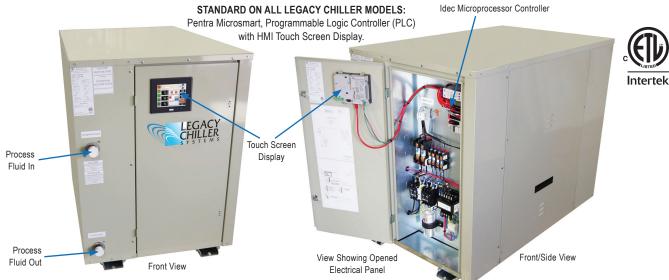

*Includes (Model OC2S) Outdoor Condenser

Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Water flow switch
- Hot gas by-pass capacity control
- 24V control transformer
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- Painted (Powder Coated), galvanized sheet metal cabinet
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid,TXV
- Complete refrigerant charge from factory
- Factory Performance Test
 prior to shipment

Easy to Use Touch Screen Display on all Legacy Chiller Models



Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- · Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure Water flow meter control (-20°F)
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- E-Coat Condenser Coil (coastal protection)
- Water Flow Meter
- · Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

DUCT DATA SHEET PR

Model: IEZA2S Split-System Air-Cooled 2 Ton Chiller



Legacy Chillers, Inc. 851 Tech Drive Telford, PA 18969

Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Single Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA	LRA	Fan Motor				Chiller	Weight	Condenser
				Voltage	Phase	Freq.	Qty.	HP	ea.	ea.	Qty.	FLA.	MCA	M.O.P	Fluid Conn.	LBS.	Selection
IEZA2SE5		28	36	208/230V	1	60Hz	1	2.5	14.1	75	1	3.8	25	35	1"	070	
IEZA2SF5				208/230V	3	60Hz			9.9	73		3.8	20	25			0000
IEZA2SH5	44			460V	3	60Hz			5.1	38		1.5	15	15	FPT	370	OC2S
IEZA2SI5				575V	3	60Hz			3.8	28		1.72	15	15			

OC2S (Outdoor Condenser Specs)

Condenser	Length	Width	Height	Fan I	Notor	Refrigerant	Weight / Ibs.	
Model	Inches	Inches	Inches	Qty.	HP	Discharge	Liquid	weight / lbs.
OC2S	36	34	40	1	1/2	1/2"	3/8"	145


Capacity Table (Refrigerant R407C)

Model	I Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
woder			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
25	ZS19KAE	42.0	2.0	1.9	9.7	1.9	2.1	8.6	1.9	2.2	8.1	1.8	2.3	7.6	1.8	2.4	7.1
		44.0	2.1	1.9	10.0	2.0	2.1	8.9	1.9	2.2	8.4	1.9	2.3	7.9	1.9	2.4	7.4
		45.0	2.2	1.9	10.2	2.1	2.1	9.1	2.0	2.2	8.5	2.0	2.3	8.0	1.9	2.5	7.5
		50.0	2.4	1.9	10.9	2.2	2.1	9.7	2.2	2.3	9.2	2.1	2.4	8.6	2.0	2.5	8.1


1. Capacities on this chart are based on refrigerant R407C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.

KW input is for compressor(s) only.
 EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.







Product Dimensional Drawing




36 ir

BACK VEW



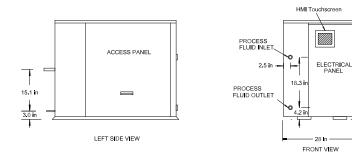



RIGHT SIDE VIEW