

# PRODUCT DATA SHEET


Model: **IEZA2.5S**  
*Split-System Air-Cooled  
2.5 Ton Chiller*



Legacy Chillers, Inc.  
851 Tech Drive  
Telford, PA 18969  
Toll-Free: (877) 988-5464

**STANDARD ON ALL LEGACY CHILLER MODELS:**  
Pentra Microsmart, Programmable Logic Controller (PLC)  
with HMI Touch Screen Display.

*\*Includes (Model OC2.5S) Outdoor Condenser*

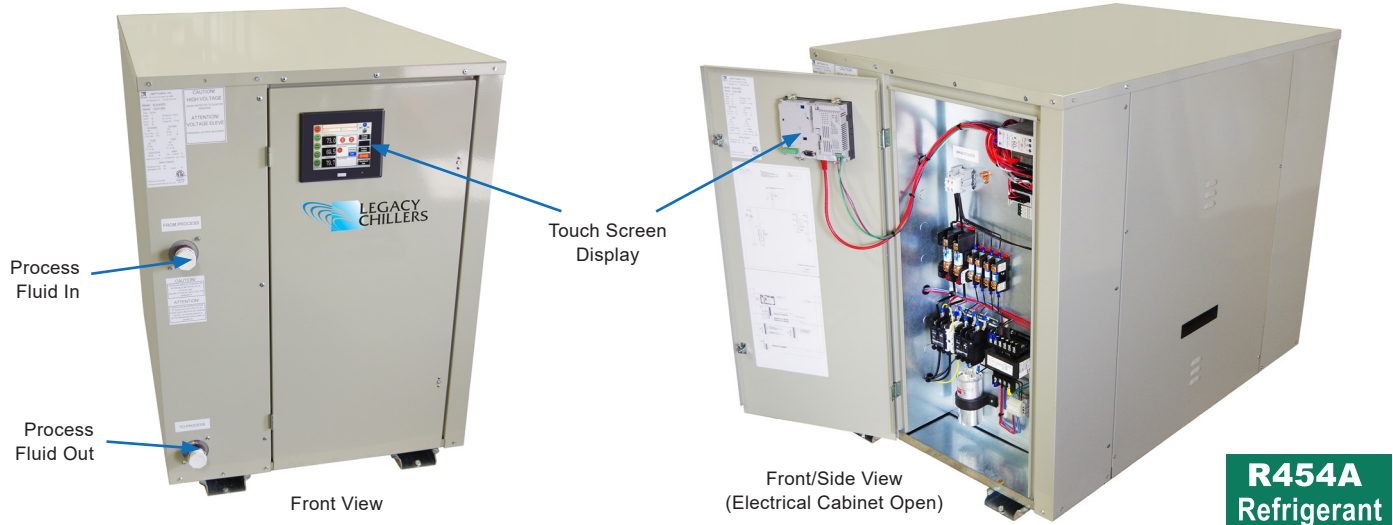

## Standard Features:

- **Conforms to UL 60335-2-40:2022 Ed.4**  
UL 60335-1:2016 Ed.6
- **CSA C22.2 # 60335-1:2016 Ed.2**
- **CSA C22.2 # 60335-2-40:2022 Ed.4**
- **Single point power connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll** compressor with crankcase heater
- **Suction accumulator**
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **Hot gas by-pass capacity control**
- **24V control transformer**
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- **Painted (Powder Coated), galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Complete refrigerant charge from factory
- **Factory performance test prior to shipment**



## Options:

- **VFD Compressor Control**
- **Process Pump VFD**
- **Remote Idec touchscreen control panel**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure (-20°F)
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- **E-Coat Condenser Coil (coastal protection)**
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI weather proof cover

# PRODUCT DATA SHEET

**Model: IEZA2.5S**  
*Split-System Air-Cooled*  
*2.5 Ton Chiller*



Legacy Chillers, Inc.  
 851 Tech Drive  
 Telford, PA 18969  
 Toll-Free: (877) 988-5464

## Dimensional & Electrical Table (Single Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	Fan Motor		MCA	MOP	Chiller Fluid Conn	Weight Pounds	Condenser Model
					Voltage	Phase	Freq.				Qty.	FLA ea.					
IEZA2.5SE7	27500	44	28	36	208/230	1	60	1	16	73	1	3.8	24	35	1 "FPT	370	OC2.5S
IEZA2.5SF7					208/230	3	60		9	63		3.8	15	20			
IEZA2.5SH7					460	3	60		4.5	31		1.5	7	15			

## OC2.5S (Outdoor Condenser Specs)

Condenser Model	Length Inches	Width Inches	Height Inches	Fan Motor		Refrigerant Connections		Weight / lbs.
				Qty.	HP	Discharge	Liquid	
OC2.5S	36	34	47	1	1/2	1/2"	3/8"	145

## Capacity Table (Refrigerant R454A)




Model	COMPRESSOR	AMB (°F)	80			90			95			100			105		
		LWT (°F)	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
2.5S	YB15KSE	42	2.4	2.7	10.4	2.2	3.0	9.0	2.2	3.1	8.3	2.1	3.2	7.7	2.0	3.4	7.1
		44	2.5	2.7	10.8	2.3	3.0	9.4	2.2	3.1	8.7	2.2	3.2	8.0	2.1	3.4	7.4
		45	2.5	2.7	11.0	2.4	3.0	9.6	2.3	3.1	8.8	2.2	3.3	8.2	2.1	3.4	7.6
		50	2.8	2.7	12.2	2.6	3.0	10.5	2.5	3.1	9.8	2.5	3.3	9.0	2.4	3.4	8.3

- Capacities on this chart are based on refrigerant R454A. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.




## Product Dimensional Drawing


**R454A**  
 Refrigerant

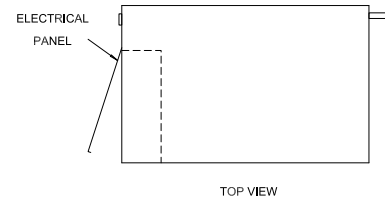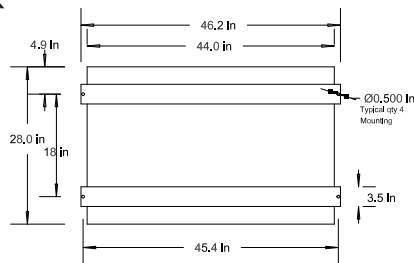


BACK VIEW



LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW