

PRODUCT DATA SHEET

Model: **IEZA36M**

*Split-System Air-Cooled
36 Ton Chiller*




Legacy Chillers, Inc.
851 Tech Drive
Telford, PA 18969


Toll-Free: (877) 988-5464

STANDARD ON ALL LEGACY CHILLER MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

**Includes (Model OC36M) Outdoor Condenser*

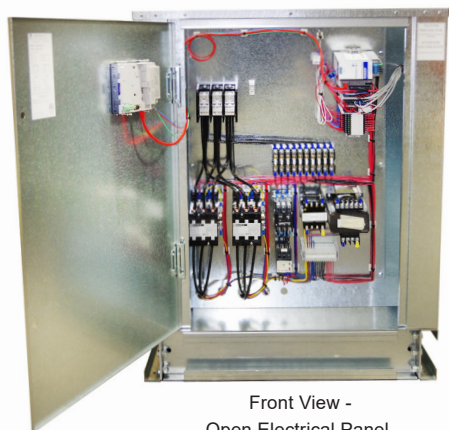

Front View -
Open Electrical Panel

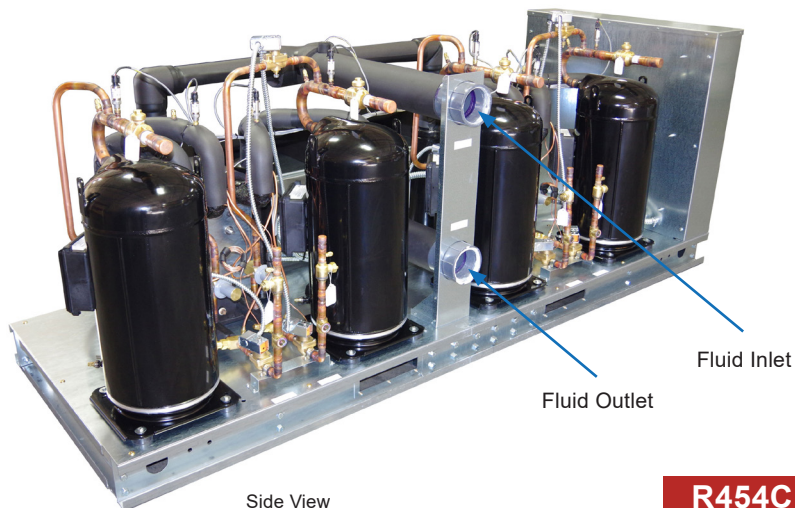

Side View

**R454C
Refrigerant**

Standard Features:

- Conforms to UL 60335-2-40:2022 Ed.4
- UL 60335-1:2016 Ed.6
- CSA 22.2 # 60335-1:2016 Ed.2
- CSA 22.2 # 60335-2-40:2022 Ed.4
- 4 independent refrigerant circuits
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll** compressor with crankcase heater
- **Suction accumulator**
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **24V control transformer**
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- **Galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



Options:

- VFD Compressor Control
- Process Pump VFD
- Remote Idec touchscreen control panel
- 5 Port Ethernet Switch
- BacNet Gateway
- Hot gas by-pass capacity control
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Rotary Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing or circuit breaker
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure (-20°F)
- Pump suction isolation valve
- Water pressure gauge set
- Coastal powder coat paint protection
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI weather proof cover

PRODUCT DATA SHEET

Model: IEZA36M
Split-System Air-Cooled
36 Ton Chiller



Legacy Chillers, Inc.
 851 Tech Drive
 Telford, PA 18969
 Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Quad Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	Fan Motor		MCA	M.O.P.	Chiller Fluid Conn	Weight Pounds	Condenser Model
					Voltage	Phase	Freq.				Qty.	FLA ea.					
IEZA36MF8	428000	112	40	42	208/23	3	60	4	38.6	239	4	7	192	225	3 "FPT	2500	OC36M
IEZA36MH8					460	3	60		18.6	125		3.5	93	110			
IEZA36MI8					575	3	60		13.1	80		2.8	67	70			

OC36M (Outdoor Condenser Specs)

Condenser Model	Length Inches	Width Inches	Height Inches	Fan Motor		Refrigerant Connections		Weight / lbs.
				Qty.	HP	Discharge	Liquid	
OC36M	127	88	49	4	1 1/2	1 5/8" (4)	1 1/8" (4)	1340

Capacity Table (Refrigerant R454C)

Model	COMPRESSOR	AMB (°F)	80			90			95			100			105		
		LWT (°F)	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
36M	YB68KAE	42	36.7	31.0	14.2	34.5	34.2	12.1	33.5	35.8	11.2	37.3	37.6	11.9	31.1	39.5	9.5
		44	38.3	31.0	14.8	36.0	34.2	12.6	34.8	36.0	11.6	39.0	37.8	12.4	32.5	39.6	9.8
		45	39.0	31.0	15.1	36.8	34.3	12.9	35.7	36.0	11.9	39.7	37.8	12.6	33.2	39.7	10.0
		50	43.2	31.2	16.6	40.7	34.5	14.1	39.5	36.3	13.1	44.0	38.1	13.9	36.8	40.0	11.0

- Capacities on this chart are based on refrigerant R454C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



Product Dimensional Drawing

R454C
Refrigerant

