

# PRODUCT DATA SHEET

Model: IEZAT6S

Split-System Air-Cooled  
6 Ton Chiller



Legacy Chillers, Inc.  
851 Tech Drive  
Telford, PA 18969


Toll-Free: (877) 988-5464

## STANDARD ON ALL LEGACY CHILLER MODELS:

Pentra Microsmart, Programmable Logic Controller (PLC) with HMI Touch Screen Display.

with Stainless Steel Tank

**R454A**  
Refrigerant

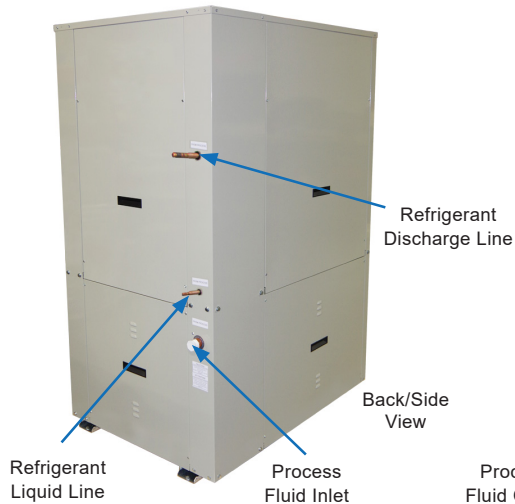

Refrigerant Discharge Line

Back/Side View

Refrigerant Liquid Line


Process Fluid Inlet



User-Friendly Touch Screen Display

Process Fluid Outlet

Front View

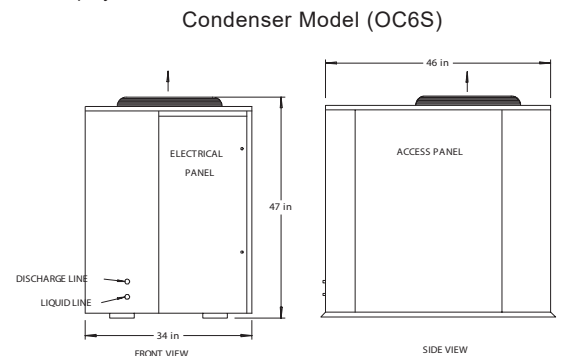

Condenser Model (OC6S)

DISCHARGE LINE  
LIQUID LINE

FRONT VIEW

SIDE VIEW

**OC Refrigerant Connections:**  
Discharge Line- 3/4", Liquid Line- 1/2"

## Standard Features:

- Conforms to UL 60335-2-40:2022 Ed.4
- UL 60335-1:2016 Ed.6
- CSA C22.2 # 60335-1:2016 Ed.2
- CSA C22.2 # 60335-2-40:2022 Ed.4
- **Single Point Power Connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll** compressor with crankcase heater
- **Suction Accumulator**
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Compressor motor contactor
- **Painted - Powder Coated (Most Models), galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



## Options:

- **VFD Compressor Control** on primary compressor
- **Remote Idec touchscreen control panel**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- 4 year extended compressor warranty
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, **STAINLESS STEEL** process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI weather proof cover

## Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts
- Auto Tank Fill

## Tank

- **STAINLESS STEEL** storage tank with 1/2 inch insulation
- Fused, **STAINLESS STEEL** re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs

# PRODUCT DATA SHEET

**Model: IEZAT6S**  
*Split-System Air-Cooled*  
*6 Ton Chiller*



Legacy Chillers, Inc.  
 851 Tech Drive  
 Telford, PA 18969  
 Toll-Free: (877) 988-5464

## with Stainless Steel Tank

### Dimensional & Electrical Table (Single Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	Fan Motor		Recirculation Pump FLA	MCA	MOP	Reservoir Gal.	Chiller Fluid Conn.	Weight Pounds	Condenser Model
					Voltage	Phase	Freq.				Qty.	FLA ea.							
IEZAT6SF7	66700	46	34	69	208/230	3	60	1	20.2	156	1	3.8	4.0	33	50	50	1" FPT	900	OC6S
IEZAT6SH7					460	3	60		9.1	75		1.5	14	20					
IEZAT6SI7					575	3	60		6.3	54		1.72	10	15					

### Capacity Table (Refrigerant R454A)

Model	COMPRESSOR	AMB (°F)	80			90			95			100			105		
			LWT (°F)	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW
6S	YB40KAE	42	5.8	5.6	12.4	5.4	6.1	10.6	5.2	6.4	9.8	5.0	6.8	8.9	4.9	7.1	8.2
		44	6.0	5.6	12.9	5.6	6.1	11.0	5.5	6.4	10.2	5.3	6.8	9.3	5.1	7.1	8.5
		45	6.1	5.6	13.2	5.8	6.1	11.3	5.6	6.4	10.4	5.4	6.8	9.5	5.2	7.1	8.7
		50	6.5	5.6	14.0	6.1	6.2	11.9	5.9	6.5	11.0	5.7	6.8	10.1	5.5	7.1	9.3

- Capacities on this chart are based on refrigerant R454A. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



### Product Dimensional Drawing

**R454A**  
**Refrigerant**

