

# PRODUCT DATA SHEET


Model: **PZA30D**  
*Packaged Air-Cooled  
30 Ton Chiller*




Legacy Chillers, Inc.  
851 Tech Drive  
Telford, PA 18969  
Toll-Free: (877) 988-5464

**STANDARD ON ALL LEGACY CHILLER MODELS:**  
Pentra Microsmart, Programmable Logic Controller (PLC)  
with HMI Touch Screen Display.

**R454A  
Refrigerant**

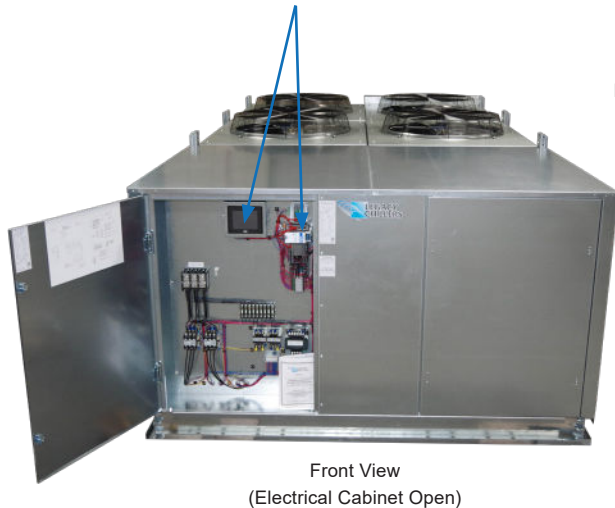

Front View  
(Electrical Cabinet Open)

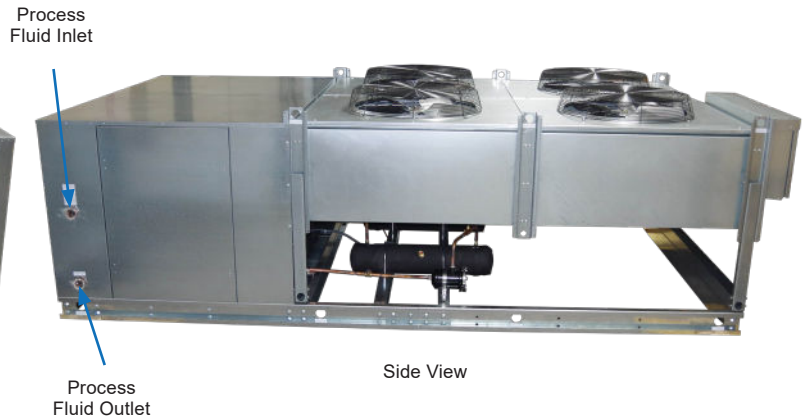

Side View

## Standard Features:

- Conforms to UL 60335-2-40:2022 Ed.4
- UL 60335-1:2016 Ed.6
- CSA C22.2 # 60335-1:2016 Ed.2
- CSA 22.2 # 60335-2-40:2022 Ed.4
- Single point power connection
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll** compressor with crankcase heater
- **Suction accumulator**
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **Hot gas by-pass capacity control**
- **24V control transformer**
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- **Galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



## Options:

- **VFD Compressor Control (Hot Gas Bypass Removed)**
- **Copeland Digital Scroll Compressor (Hot Gas Bypass Removed)**
- **Remote Idec touchscreen control panel**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **STAINLESS STEEL Process Pump**
- **Process Pump VFD Controller**
- 4 year extended compressor warranty
- Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase/voltage monitor
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Flooded cond. w/**Heated** receiver/head pressure control (-20°F)
- Pump suction isolation valve(s)
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- E-Coat Condenser Coil (coastal protection)
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI weather proof cover

# PRODUCT DATA SHEET

**Model: PZA30D**  
*Packaged Air-Cooled  
 30 Ton Chiller*



Legacy Chillers, Inc.  
 851 Tech Drive  
 Telford, PA 18969  
 Toll-Free: (877) 988-5464

## Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	Fan Motor		MCA	MOP	Chiller Fluid Conn.	Weight Pounds
					Voltage	Phase	Freq.				Qty.	FLA ea.				
PZA30DF7	365000	176.5	88	55	208/230	3	60	2	56.5	321	4	7	155	200	2 "FPT	3550
PZA30DH7					460	3	60		24.4	179		3.5	69	90		
PZA30DI7					575	3	60		18.8	145		2.8	54	70		

## Capacity Table (Refrigerant R454A)


Model	COMPRESSOR	AMB (°F)	80			90			95			100			105		
			LWT (°F)	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW
30D	YB100KAE	42	31.5	27.2	13.9	29.6	30.2	11.8	28.6	31.8	10.8	27.6	33.5	9.9	26.6	35.3	9.0
		44	32.8	27.2	14.5	30.8	30.3	12.2	29.8	31.9	11.2	28.8	33.6	10.3	27.7	35.4	9.4
		45	33.5	27.2	14.8	31.4	30.3	12.5	30.4	31.9	11.5	29.3	33.7	10.5	28.3	35.5	9.6
		50	37.0	27.3	16.3	34.7	30.4	13.7	33.7	32.1	12.6	32.5	33.9	11.5	31.3	35.7	10.5

- Capacities on this chart are based on refrigerant R454A. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



## Product Dimensional Drawing

**R454A  
 Refrigerant**

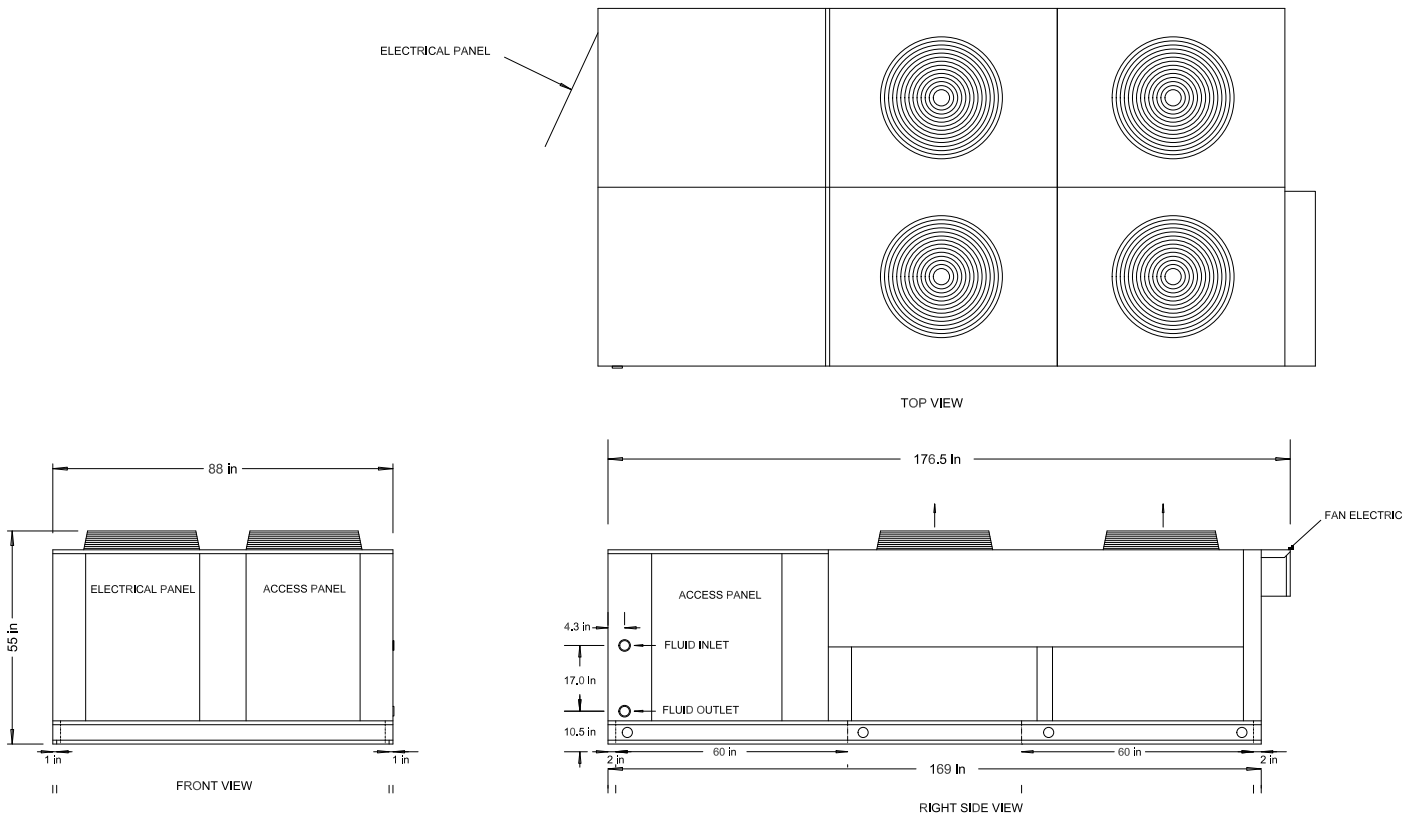

Qty 8 Mounting  
 .438 Dia