

# PRODUCT DATA SHEET

Model: **PZW22D**

*Packaged Water-Cooled  
22 Ton Chiller*



Legacy Chillers, Inc.  
851 Tech Drive  
Telford, PA 18969


Toll-Free: (877) 988-5464

**STANDARD ON ALL LEGACY CHILLER MODELS:**  
Pentra Microsmart, Programmable Logic Controller (PLC)  
with HMI Touch Screen Display.

**R454C  
Refrigerant**



User-Friendly  
HMI Touch Screen  
Display

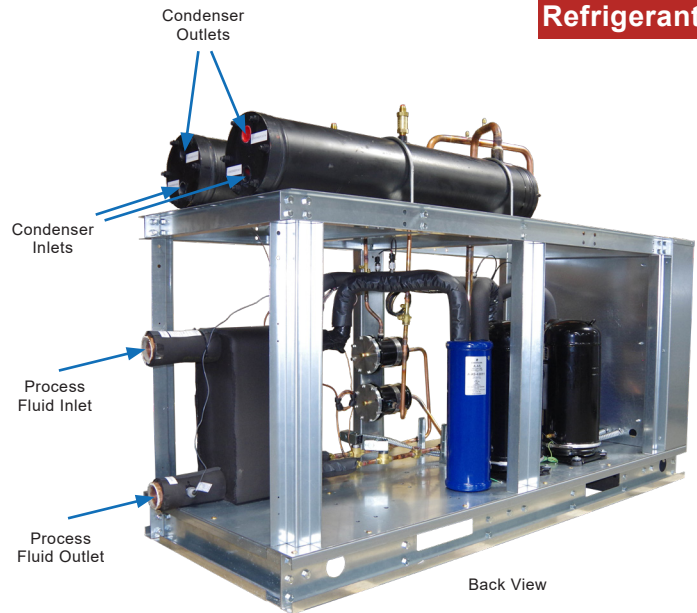

Condenser  
Outlets  
Condenser  
Inlets  
Process  
Fluid Inlet  
Process  
Fluid Outlet

Back View

## Standard Features:

- Conforms to UL 60335-2-40:2022 Ed.4  
UL 60335-1:2016 Ed.6
- CSA C22.2 # 60335-1:2016 Ed.6
- CSA C22.2 # 60335-2-40:2022 Ed.4
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- **STAINLESS STEEL**, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Liquid line drier, sight glass, solenoid
- Electronic expansion valve
- Manual high pressure cutout
- **Water flow switch**
- **Hot Gas Bypass Capacity Control**
- **24V control transformer**
- Control circuit fusing
- Condenser(s): Coaxial up to PZW18D
- Condenser(s): Shell and Tube on units larger than 18 ton
- Compressor motor contactor
- **Painted - Powder Coated** (up to PZW18D), **galvanized sheet metal cabinet**
- 1/2" insulation on all water and refrigerant lines
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**



## Options:

- **VFD Compressor Control**
- **Copeland Digital Scroll Compressor**
- **Remote Idec touchscreen control panel**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, **STAINLESS STEEL** process pump
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

# PRODUCT DATA SHEET

**Model: PZW22D**  
*Packaged Water-Cooled*  
*22 Ton Chiller*



Legacy Chillers, Inc.  
 851 Tech Drive  
 Telford, PA 18969  
 Toll-Free: (877) 988-5464

## Dimensional & Electrical Table (Dual Circuit)

Chiller Model	Nominal BTUH	Length Inches	Width Inches	Height Inches	Power			Compressor Qty.	RLA ea.	LRA ea.	MCA	MOP	Chiller Fluid Conn	Weight Pounds
					Voltage	Phase	Freq.							
PZW22DF8	273000	85	34	59	208/230	3	60	2	47.4	298	107	150	2 "FPT	1850
PZW22DH8					460	3	60		21.8	150	49	70		
PZW22DI8					575	3	60		18.7	123	42	60		

## Capacity Table (Refrigerant R454C)

Model	COMPRESSOR	COND(°F)	105		
		LWT (°F)	TONS	KW	EER
22D	YB83KAE	42	21.3	20.3	12.6
		44	22.3	20.4	13.1
		45	22.8	20.4	13.4
		50	25.2	20.5	14.7

- Capacities on this chart are based on refrigerant R454C. Lower leaving water or low ambient can require the use of a glycol solution or other fluid blends. These solutions affect unit capacities. Please consult the factory on these or other special fluids.
- KW input is for compressor(s) only.
- EER = Energy Efficiency Ratio (BTU/watt-hour). Power inputs include compressor (s), condenser fan motor (s) and control power.



## Product Dimensional Drawing

**R454C**  
**Refrigerant**

