PRODUCT DATA SHEET

Model: **PZWT18D** Packaged Water-Cooled 18 Ton Chiller



Legacy Chiller Systems 851 Tech Drive Telford, PA 18969

Toll-Free: (877) 988-5464



Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Condenser(s): Coaxial up to PZW22D
- Compressor motor contactor
- Painted Powder Coated (Most Models), galvanized sheet metal cabinet
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment
- Extended warranty: See your quote or latest IOM booket revision

Tank

- STAINLESS STEEL storage tank with 1/2 inch insulation
- Fused, **STAINLESS STEEL** re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs

Easy to Use Touch Screen Display on all Legacy Chiller Models



Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage Comproser fusion
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts

PRODUCT DATA SHEET

Model: **PZWT18D** Packaged Water-Cooled 18 Ton Chiller



Legacy Chiller Systems 851 Tech Drive Telford, PA 18969

Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Dual Circuit)


Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA	LRA	Recirculation			Reservoir	Chiller	Weight
				Voltage	Phase	Freq.	Qty.	HP	ea.	ea.	Pump FLA	MCA	M.O.P	Gal.	Fluid Conn.	Pounds
PZWT18DF5	85	34	70	208/230V	3	60Hz	2	10	37.2	239	5.6	100	125	120	1.5" 145 FPT 145	
PZWT18DH5				460V	3	60Hz			17.2	125	2.8	50	60			1450
PZWT18DI5				575V	3	60Hz			12.4	80	1.8	35	45			

Capacity Table (Refrigerant R407C)


Model	Comprosort	LWT	105°F Condensing				
Model	Compressor	°F	TONS	KW	EER		
		*42.0	15.9	16.0	13.9		
18D	ZB76KCE	*44.0	16.7	16.1	14.5		
100		45.0	17.0	16.1	14.8		
		50.0	18.9	16.2	16.3		
		L.					

* = Requires the use of glycol.





Product Dimensional Drawing

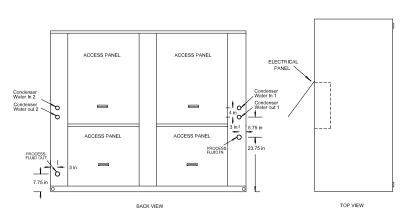

ACCESS PANEL

