

PRODUCT DATA SHEET

Model: IEZAT2S
Split-System Air-Cooled
2 Ton Chiller





Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464



with Stainless Steel Tank

STANDARD ON ALL LEGACY CHILLER MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

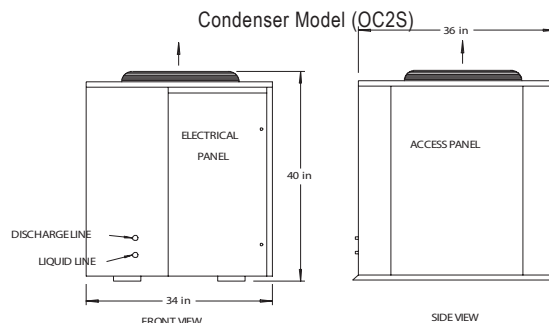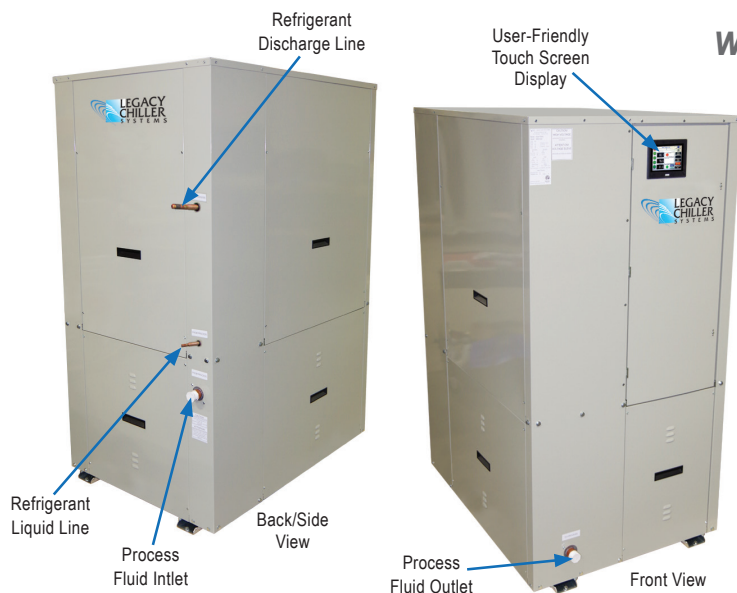

OC Refrigerant Connections: Discharge Line- 1/2", Liquid Line- 3/8"

Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Compressor motor contactor
- Painted - Powder Coated (Most Models), galvanized sheet metal cabinet
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- Factory Performance Test prior to shipment
- Extended warranty: See your quote or latest IOM booklet revision

Tank

- STAINLESS STEEL storage tank with 1/2 inch insulation
- Fused, STAINLESS STEEL re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs

Easy to Use
Touch Screen Display
on all Legacy Chiller
Models



Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control on primary compressor
- 4 year extended compressor warranty
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts
- Auto Tank Fill

PRODUCT DATA SHEET

Model: IEZAT2S
Split-System Air-Cooled
2 Ton Chiller



Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464

with Stainless Steel Tank

Dimensional & Electrical Table (Single Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		Recirculation Pump FLA	MCA	M.O.P.	Reservoir Gal.	Chiller Fluid Conn.	Weight LBS.	Condenser Selection
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.							
IEZAT2SE5	36	34	65	208/230V	1	60Hz	1	2.5	14.1	75	1	3.8	4.2	30	40	20	1" FPT	650	OC2S
IEZAT2SF5				208/230V	3	60Hz			9.9	73		3.8	4.2	25	30				
IEZAT2SH5				460V	3	60Hz			5.1	38		1.5	0.9	15	15				
IEZAT2SI5				575V	3	60Hz			3.8	28		1.72	0.72	15	15				

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
2S	ZS19KAE	*42.0	1.9	1.9	9.7	1.8	2.1	8.6	1.7	2.2	8.1	1.7	2.3	7.6	1.6	2.4	7.1
		*44.0	2.0	1.9	10.0	1.9	2.1	8.9	1.8	2.2	8.4	1.7	2.3	7.9	1.7	2.4	7.4
		45.0	2.0	1.9	10.2	1.9	2.1	9.1	1.8	2.2	8.5	1.8	2.3	8.0	1.7	2.5	7.5
		50.0	2.2	1.9	10.9	2.1	2.1	9.7	2.0	2.3	9.2	2.0	2.4	8.6	1.9	2.5	8.1

* = Requires the use of glycol.



Product Dimensional Drawing

