

PRODUCT DATA SHEET

Model: IEZA26D

*Split-System Air-Cooled
26 Ton Chiller*




Legacy Chiller Systems


851 Tech Drive
Telford, PA 18969

Toll-Free: (877) 988-5464

STANDARD ON ALL LEGACY CHILLER MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.

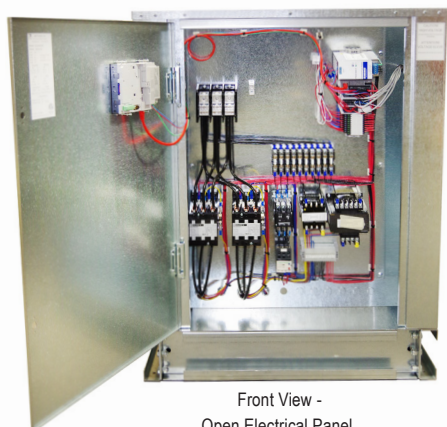

Front View -
Open Electrical Panel

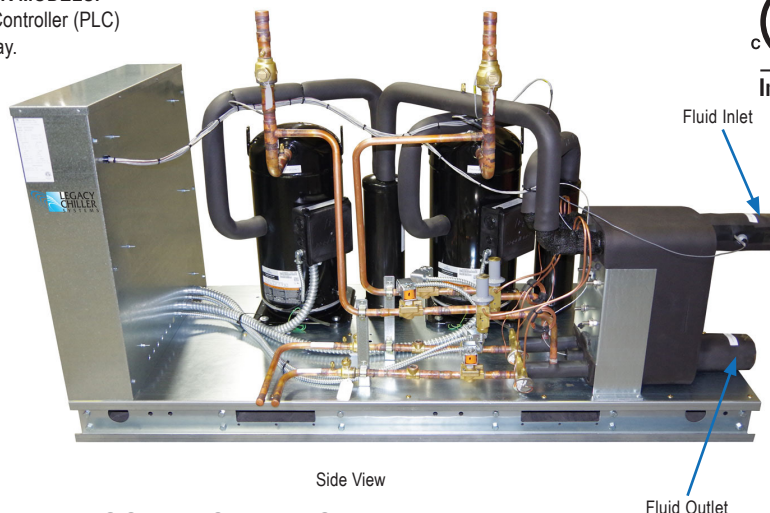

Side View

**Includes (Model OC26D) Outdoor Condenser*

Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Water flow switch
- Hot gas by-pass capacity control
- 24V control transformer
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- Painted (Powder Coated), galvanized sheet metal cabinet
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**
- **Extended warranty:** See your quote or latest IOM booklet revision

**Easy to Use
Touch Screen Display
on all Legacy Chiller
Models**



Options:

- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control on primary compressor
- 4 year extended compressor warranty
- Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure Water flow meter control (-20°F)
- Pump suction isolation valve
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- **E-Coat Condenser Coil (coastal protection)**
- Water Flow Meter
- Auto city water make up solenoid & auto level switch
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

PRODUCT DATA SHEET

Model: IEZA26D
Split-System Air-Cooled
26 Ton Chiller



Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Dual Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		MCA	M.O.P	Chiller Fluid Conn.	Weight LBS.	Condenser Selection
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.					
IEZA26DF5	85	34	42	208/230V	3	60Hz	2	15	53.8	340	2	7	150	200	2" MPT	1500	BNH217
IEZA26DH5				460V	3	60Hz			28.2	173		3.5	80	100			
IEZA26DI5				575V	3	60Hz			22.4	132		2.8	70	80			

OC26D (Outdoor Condenser Specs)

Condenser Model	Length Inches	Width Inches	Height Inches	Fan Motor		Refrigerant Connections		Weight / lbs.
				Qty.	HP	Discharge	Liquid	
OC26D	127	46	49	2	1 1/2	1 1/8" (2)	5/8" (2)	680

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
26D	ZR114KCE	42.0	26.0	23.4	10.9	24.8	26.0	9.5	24.2	27.5	8.9	23.7	28.9	8.3	23.0	30.5	7.7
		44.0	26.7	23.5	11.2	25.2	26.2	9.7	24.9	27.6	9.1	24.3	29.1	8.5	23.7	30.7	7.9
		45.0	27.2	23.6	11.3	25.9	26.3	9.9	25.3	27.7	9.2	24.8	29.2	8.6	24.1	30.8	8.0
		50.0	29.1	23.9	12.0	27.8	26.6	10.5	27.1	28.1	9.7	26.5	29.9	9.1	25.8	31.1	8.5



Product Dimensional Drawing

